

UBTik Custom 5GHz HP MiMO MikroTik Access Point for Ubiquiti Antennas

MW-UBTik-CUSTOM

Full Featured Design

Powered by MikroTik - Antenna System

Introducing a MikroTik access point to work with Ubiquiti antennas, custom made with the RouterBOARD of your choice! UBTiks unique design enables a MikroTik RB911 or RB912 series RouterBOARD to be mounted onto most Ubiquiti antennas, taking advantage of one of the best carrier class antenna systems available in the market. Simply clip-on, plug-and-play, and you instantly have a MikroTik point-to-point or point-to-multipoint system.

More Choices



RB911G-5HPacD



RB911G-2HPnD



RB912UAG-5HPnD



RB912UAG-2HPnD

UBTik products make it possible for a MikroTik user to easily connect up with most Ubiquiti antennas. *UBTik products are compatible with most Ubiquiti airMAX sector, omni, and dish antennas.

*Not compatible with: AM-5G16, AM-5G17



UBTik Custom
(open enclosure without cover)



UBTik Custom
(back of enclosure)

KEY PRODUCT BENEFITS

- MiMO
- Easily clips onto most Ubiquiti antennas
- Weatherproof NEMA 4 Enclosure
- Gigabit Ethernet
- Up to 300Mbps



UBIQUITI COMPATIBLE ANTENNAS

- airMAX sector antennas
AM-5G19
AM-5G20
- airMAX omni antennas
AMO-5G10
AMO-5G13
- RocketDISH antennas
RD-5G30
RD-5G34



UBTIK PRODUCTS AVAILABLE

- 5GHz HP 802.11ac MiMO
SKU: MW-UBTIK-AC
- 5GHz 802.11ac PTP Starter Kit
SKU: MW-UBTIK-PTP



UBTik Custom 5GHz HP MiMO MikroTik Access Point for Ubiquiti Antennas

Technical Specifications

Full Featured Design

Product Features

- CPU: Atheros 600 - 720Mhz
- RAM: 64MB RAM / 64 NAND
- Ethernet: 1 x 10/100/1000 Auto MDI-X Port
- Antenna connector type: 2 x weatherproof RP-SMA

Operating System

- MikroTik RouterOS version 5
- MikroTik RouterOS Level 4 license

Mechanical / Environmental

- Form factor: NEMA 4 outdoor sealed enclosure
- Operating temp: -25C - + 65C
- Chassis material: Powder coated aluminum
- Dimensions: 7.75" x 5.75" x 2" (19.7 x 14.6 x 5.1cm)
- Weight: 0.90lb (0.41kg)
- Pwer requirements: 12-28vDc, PoE

Packling List


- 1 x 5GHz Custom UBTik
- 1 x 18POW 24vDc switching power supply and Gigabit passive PoE injector
- 2 x MMCX to RP-SMA weatherproof connectors
- 1 x Grounding lug with nut
- 1 x RJ45 passthrough connector
- 2 x RP-SMA to RP-SMA path cable (as spares)



Bottom view
Includes 2 SMA type, and 2 RJ45 type knockouts



Top view
Includes 2 SMA type, and 2 N-type knockouts

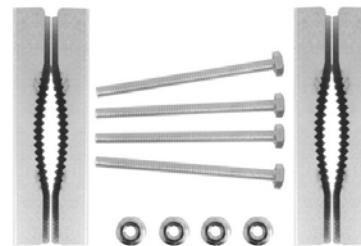

MW-ODE-PIPECLAMP



MW-PIPECLAMP-RING

Options (sold separately)

Pipe clamp mounting hardware